


Connect your USB Device.  
Just what you need.



## 3 USB Ports Card

The Flexy USB card provides OEM and system integrators an additional way to connect to their industrial devices. Many small automation devices have seen their programming port which in the past worked through serial connectivity be replaced by USB connectivity. The 3 ports USB card is a 2.0 version at full speed and can pilot up to 10 USB connections.

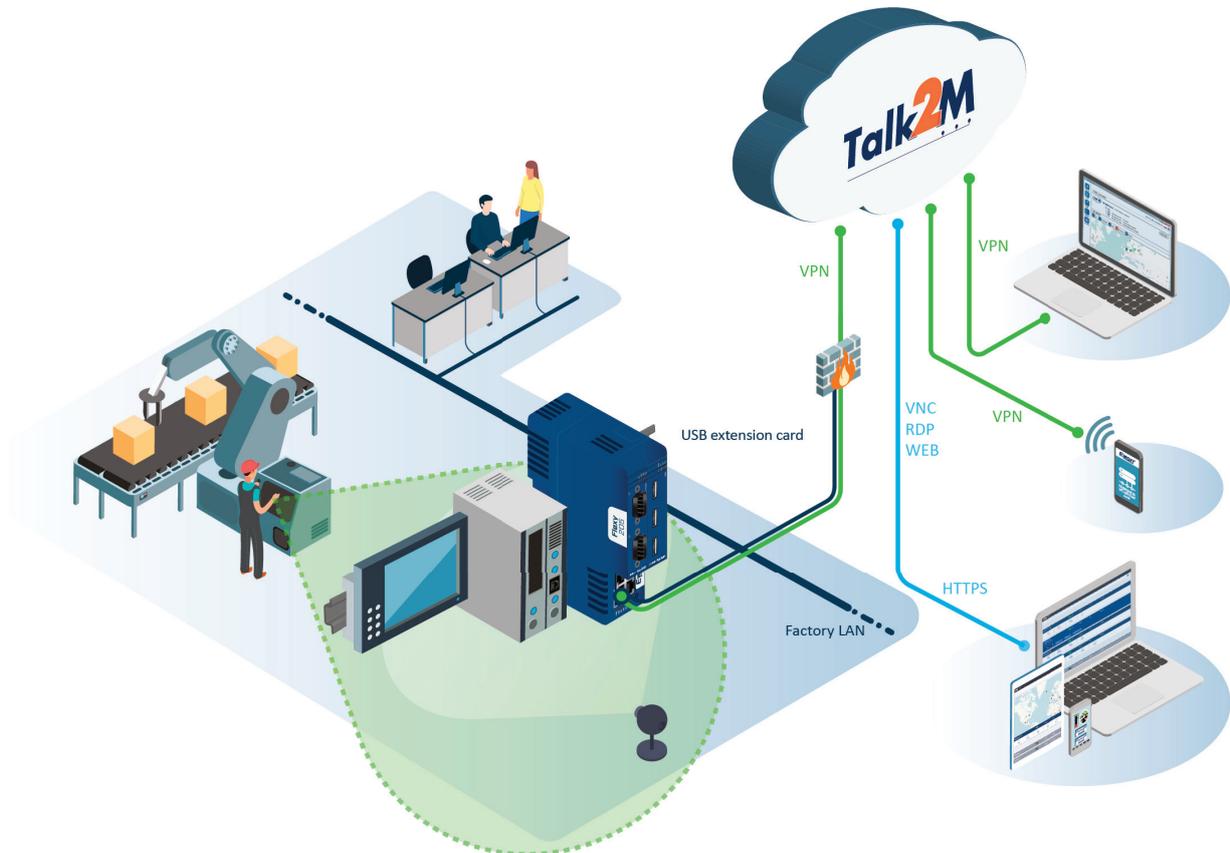


## Technical characteristics:

<b>Leds</b>		4 leds:1 global status, 1 for each port status.
<b>Connector</b>		Type A female
<b>Current limit</b>		Each port has its own 500mA current limit . Global current limit on the board is 500mA
<b>Port activation</b>		All ports will be enabled/disabled together
<b>Isolation</b>		Earth GND isolation is limited to 500V due to USB connector design
<b>Operating temp.</b>		-25 to +60°C
<b>Certifications</b>		
CE	Compliant with	EMC directive 2014/30/EU; LVD 2014/35/EU RoHS3 directive 2015/863/EU REACH
	According to standards	EMC emission Class A EN55032; EN55024 Safety: EN60950-1; EN62368-1
FCC	Compliant with	This product complies with the Part 15 of the FCC rules
Japan	Compliant with	This device complies with Japanese regulations
Safety	Conform to	EN;UL;IEC;CAN 60950-1 EN;UL;IEC;CAN 62368-1 UL recognized: file number E350576 CB certificate n° DK-53957-A1-UL & DK-84039-UL
<b>Ordering Ref.</b>		
<b>FLB3601</b>		

## Discover more:

The Ewon Flexy is equipped with extensions cards allowing you to keep up with the evolution of communication technologies while protecting your investment in the device. Discover them all and build your perfect Flexy!

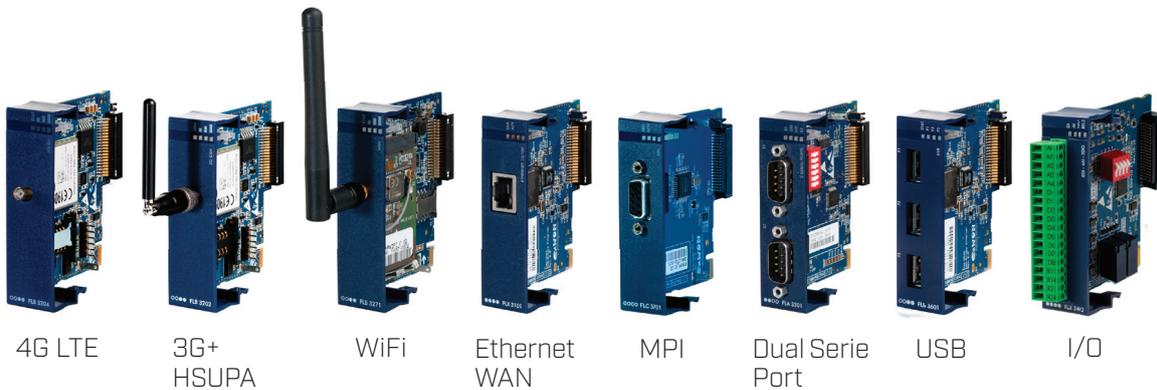

4G LTE

3G+  
HSPA

WiFi

Ethernet  
WAN

MPI

Dual Serie  
Port

USB

I/O



Learn more on [www.ewon.biz](http://www.ewon.biz)

The Ewon Flexy is a multipurpose internet data gateway that allows Machine Builders to monitor and collect vital KPIs for analysis and predictive maintenance.

